



# OneScreen GoSafe Pro

## Securely manage your entryway.

More than a temperature scanner, it adapts to your entryway management needs.

1. Securely scan temperatures in less than a second
2. Accurately measure temperatures within 0.9 F
3. 99% accurate facial recognition without mask
4. Reliably detect for a wide variety of mask styles
5. Free, unlimited help & training



Table Top



Wall Mount



Vertical Stand



Phone: 800.821.4430  
Email: [order@aaasolutions.com](mailto:order@aaasolutions.com)  
Web: [aaasolutions.com](http://aaasolutions.com)

OneScreen GoSafe Pro can prevent people with elevated temperature or no mask from entering your offices, schools, hospitals & public spaces.


made with  
**Qualcomm**  
Technologies



Seamlessly integrates with **brother** printer

## Advanced Management Console

AI-enabled system that provides ever-smarter insight from your data

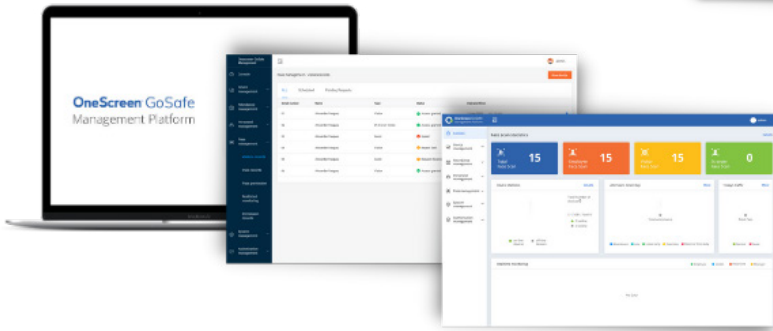

## OneScreen™ GoSafe Prescreen

Easily prequalify visitors based on customizable questions



Built on SQL8 for the most secure data storage

### SPECIFICATIONS

<b>Screen</b>	
Size	8.0" IPS LCD screen
Resolution	800x1280
<b>Processor</b>	
CPU	Qualcomm Snapdragon Octa-Core Processor
Chipset	MSM8953
System	Android 8.1.0
Storage	EMMC 16 GB
<b>Camera</b>	
Resolution	2 million pixels
Type	Binocular vision wide dynamic camera
Aperture	F2.4
Focusing Distance	19.6" – 60"
White Balance	Auto
Photo Flood Light	LED and IR dual photo fill-in light
<b>Infrared Thermal Imaging Module</b>	
Temperature Detection	Available
Temperature Detection Distance	3.2' (optimal distance 1.6')
Temperature Measurement Accuracy	≤ ±0.9 °F
Temperature Measurement Range	50 °F – 107.6 °F
Thermal Scanner Country Of Origin	Germany
Elevated Temperature Alarm	Supported (temperature alarm value can be set)
<b>Interfaces</b>	
Network Module	Ethernet (RJ-45) and Wireless (Wi-Fi)
Audio	2.5W / 4R speakers
USB	1 USB OTG, 1USB HOST standard A port
Serial Communication	1 RS232 serial port
Relay Output	1 door open signal output

Wiegand	1 Wiegand 26/34 Output
Upgrade Button	Supports USB boot upgrade button
<b>Access Control Options on Device</b>	
Mask Detection	Available
Facial Recognition	Available
IC Card Based Control	Available
Reception Desk Configuration	Available
<b>Additional Software Benefits via Console</b>	
Server-Based Facial Recognition	Available
OneScreen Prescreen Survey Application	Available
Badge Printing Application	Available and functional with Brother Printer QL820NB
Attendance Tracking & Reporting	Available
Email & SMS Notification	Available
Call IT / Screen Skills Guru for Support	Available
Remote Management	Available
Database supported for facial recognition Support	Up to 2,000 unique users (facial data) with above 99% accuracy
Storage capacity on device for facial data	Upto 30,000 unique faces and more than 100,000 for storage
<b>System</b>	
Power	DC 12V
Operating Temperature	0 °F – 140 °F
Power Consumption	13.5W Max
Installation Method	Wall Mount, Table Stand & Floor Stand
Product Size	10.4" x 4.88"
Weight	2.64 (lb)
What's in the Box	OneScreen GoSafe, Power Adapter, User Manual

\*Shipping weight excludes accessories. Accessories shipped separately. Specifications are subject to change at any time without notice.



Phone: 800.821.4430  
 Email: [order@aaasolutions.com](mailto:order@aaasolutions.com)  
 Web: [aaasolutions.com](http://aaasolutions.com)